


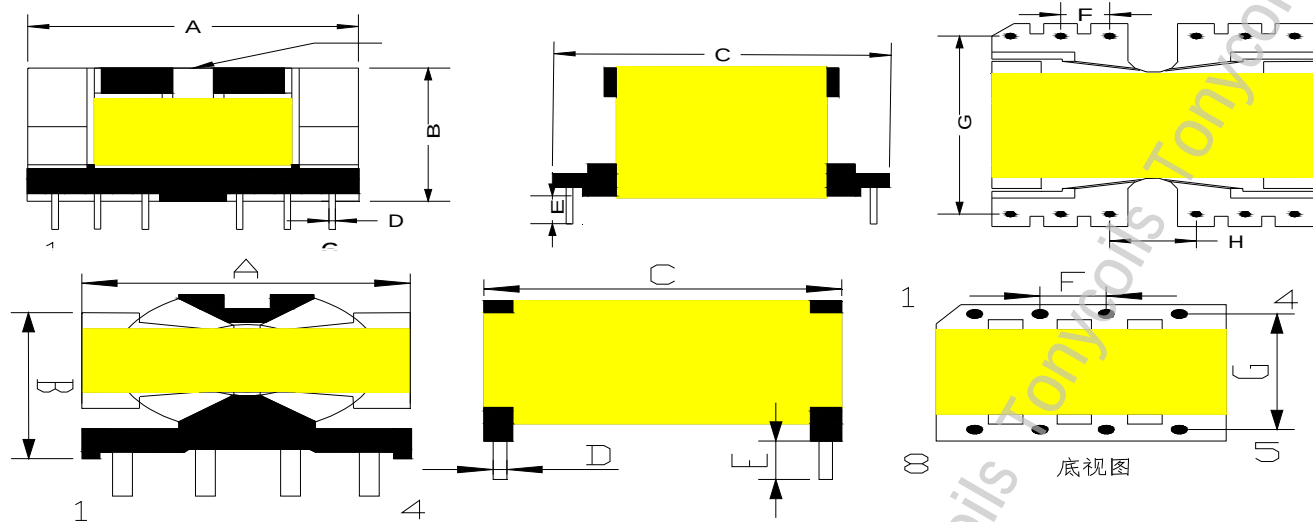

规格型号	安装方式	A	B	C	D	E	F	G	PIN数	AE值	备注
		MM	MM	MM	MM	MM	MM	MM		截面面积 MM ²	
PQ2014	V	22	16	27	0.7	4	3.75	23.4	5+5	57.6	
PQ2014	V	22	15	27	0.7	4	3/3.5/4.4	14.2/15.2/22.3	4+2+2	57.6	非对称
PQ2014	V	22	15	22	0.6	4	3/4.8	15.5	5+2	57.6	
PQ2016	V	23	17.5	23	0.6	4	3.7/2.5	20.2	6+8	62	
PQ2016	V	22	21	22	0.7	4	3.5	19	6+6	62	高挡板
PQ2020	V	22	22	22	0.6	4	3.8/2.5	20/20.4	6+8	62	
PQ2020	V	22	22	22	0.7	4	3.5	18.95	6+6	62	
PQ2020	H	22	19	22	0.8	4	5	17	4+3	62	
PQ2614	V	28	16	29	0.6	4	3.8	25.5	6+5	119	
PQ2615	V	28	16	30	0.7	4	3.8	25.5	6+6	119	
PQ2620	V	28	22	30	0.8	4	3.8	25.5	6+6	119	
PQ2620	V	28	22	36	0.7	4	3.8/7.5	32.5	6+2	119	单边缺口
PQ2620	V	28	22	34	0.7	4	3.8	30	6+4	119	
PQ2622	H	22	22	25	0.7	4	3.75	21	4+4	118	
PQ2620	V	28	22	34	0.8	4	3.75	30	6+7	119	
PQ2621	H	28	27	21	0.8	4	3.8	16.7	6+6	119	
PQ2625	V	28	25	30	0.7	4	3.8	25.5	6+6	118	
PQ2625	H	28	28	30	0.8	4	4.5/5	26.3	6+4	118	
PQ2627	H	28	22	25	0.7	4	3.4/5.5	20.4	3+2	118	非对称
PQ2627	H	28	28	21	0.8	4	4	15.9	3+3	118	
PQ3017	V	32	16	28	0.8	4	4.7/7.7	23.8/24.8	4+2	123	非对称
PQ3219	V	34	26	28	0.8	4	4	21.7/24.7	3+3	155	
PQ3220	V	34	22	35	0.8	4	5	30/30.5	6+6	169	
PQ3220	V	34	22	37	0.8/3.7	4	5	30	6+0	169	
PQ3220	V	34	23	25	0.8	4	8+6/8+10	20	2+2	169	两款脚距
PQ3225	V	34	27	35	0.8	4	5	30/30.5	6+6	166	
PQ3230	V	34	32	35	0.8	4	5	30/30.5	6+6	164	
PQ3230	V	34	37	35	0.8	4	5/27.5	30	6+2	164	
PQ3230	H	34	31	31	1	4	4--3	25.5	5+4	164	单/双槽
PQ3525	V	37	27	40	0.8	4	5	36.4	6+6	186.93	
PQ3530	V	37	30	40	1	4	4.5	35.4	6+6	187	
PQ3535	V	37	37.5	40	1	4	5	35.5	6+6	184	
PQ3537	H	37	34	36.5	1	4	5/7.8	32.5	6+4	184	
PQ3540		37	42.7	40	1	4	5.1	35.6	6+6	186.6	
PQ4040		42	42.7	42	0.9	4	5.08	38.1	6+6	203.84	
PQ5040		52	40	48	2	4	10	38	2+2	316.82	
PQ5050		52	53	50	1.2	4	7.55	45	6+6	314	